


RT.60.K1.000 C

Перв. примен.

Справ. №

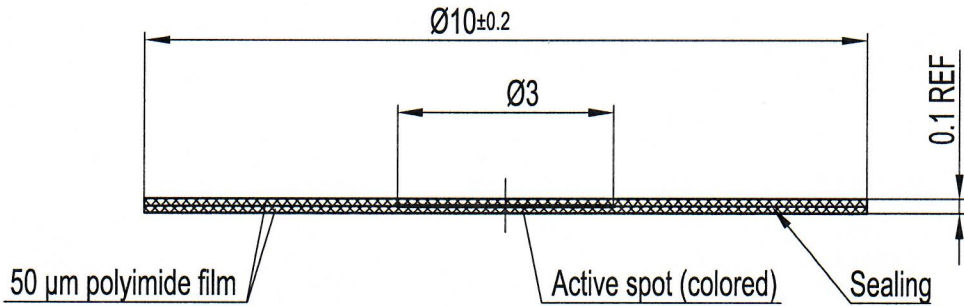

1. Activity of Co-60 is 74 – 99 kBq (2.0 – 2.7 µCi).
2. Operating conditions:
 - temperature: -50 °C ... +175 °C;
 - relative humidity: up to 98 % at temperature 40 °C;
 - allowed absolute pressure range: from 25 kPa to 500 kPa;
 - resistant to impact with 50 m/s² maximum acceleration at 100 ms pulse duration;
 - acceptable vibration frequency from 5 to 50 Hz with acceleration from 5 to 50 m/s².
3. Classification: ISO/12/C 35242.
4. Leakage test is according to ISO 9978-92, paragraph 5.3.1 (wet wipe test). Activity of a swab less than 20 Bq.
5. Radioactive contamination level of the source less than 20 Bq (wet wipe test).
6. The recommended working life is 10 years.

RT.60.K1.000 C

Gamma source
GCo0.T1

Лит.	Масса	Масштаб
Lit.	Weight	Scale
		10:1
Лист	1	Листов
Sheet		Sheets
		1



Rev.	Sheet	Document	Signature	Date
Изм.	Лист	№ докум.	Подп.	Дата
Разраб.				23.04.2019
Designed				2019
Н.контр				23.04.2019
Inspector				2019
Утв.				23.04.2019
Approved				2019

The contents of this drawing and its enclosures are our property. The drawing and its enclosures may not be duplicated without our written approval nor be made accessible to any third party. Any unauthorised usage is unlawful and will be prosecuted. Copyright reserved.